



Element face bitmap



PRINCIPLE DIAGRAM

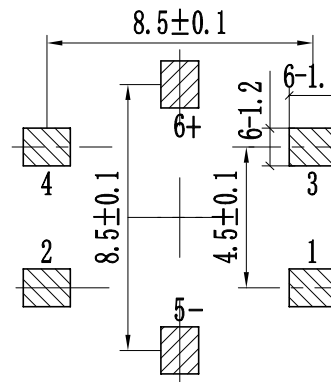

Main Specifications:

Climate Grade: -25 ~+75

Rated Values: 30V DC,0.3A

Contact Resistance: 0.05

Dielectric Strength: 250V AC

Insulation Resistance: 100M

Operating Force: 260gf ± 50gf

Life: 10W times

Salt mist Test: 12 ± 1 hours

Led Color	Part No
Red	TPDD006AR
Blue	TPDD006ABL
Yellow	TPDD006AY
Green	TPDD006AG

ITEM	PAPT NAME	MATERIAL	QTY	Coating/color
7	Transparent sheet	PVC	1	transparent
6	Round cap	ABS	1	Black
5	LED		1	transparent
4	Button	PA66	1	White
3	Shrapnel	SUS	1	Ag
2	Pedestal	PA66	1	Black
1	Clasp	H62	1	Ag

REV.	DATE	REVISION DESCRIPTION	ISSUE
A4			
A3			
A2			
A1			

台普
ROC PU

COMMON TOLERANCE:	
x.xx	± 0.10
x.x	± 0.15
x	± 0.25
ANGULAR	—

UNIT	MM	PROJECTED	PRODUCT NAME:	TPDD006AX
DRAWN BY	FUYUAN	CHECKED BY	COCO	MODEL NO:
DATE	2017	APPROVAL BY	ALEN	Https : www.rocpu.com

ROC PU TECHNOLOGY CO.,LTD

Copies are issued in strict confidence and shall not be reproduced or copied, or used as the basic of manufacture or sale of apparatus without permission